







logtrec.[®]-MTH

Your Benefits:

- ✓ Accurate Digital Sensor
- ✓ Automatic PDF/CSV Reporting
- ✓ Digital Certificate of Validation
- ✓ Shelf Life up to 24 Months



The logtrec.[®]-MTH is designed for GDP compliant cold chain monitoring, maximum reliability and easy handling. The Two-Button-Operation allows you to easily start and stop the logger. All reportings such as PDF and CSV will be generated automatically. The integrated digital temperature sensor allows precise measurements during the whole temperature range. The NIST traceable certificate of validation is directly stored on the datalogger

-  **GDP Compliant**
-  **Automatic USB Reporting**
-  **EN12830 certified**
-  **Certificate of Validation**
-  **USB Connection**
-  **Operation -30°C to +70°C**
-  **German Engineering**



Food/Beverage



Pharmaceutical



Technology/Laboratory




Warehousing


Easy Handling

- ✓ Starting the logger by pressing the START button for 5sec.
- ✓ Add it to your shipment
- ✓ Unpack the goods and stop the logger by pressing the STOP button for 5 sec.
- ✓ Connect it to the computer and get all reports automatically



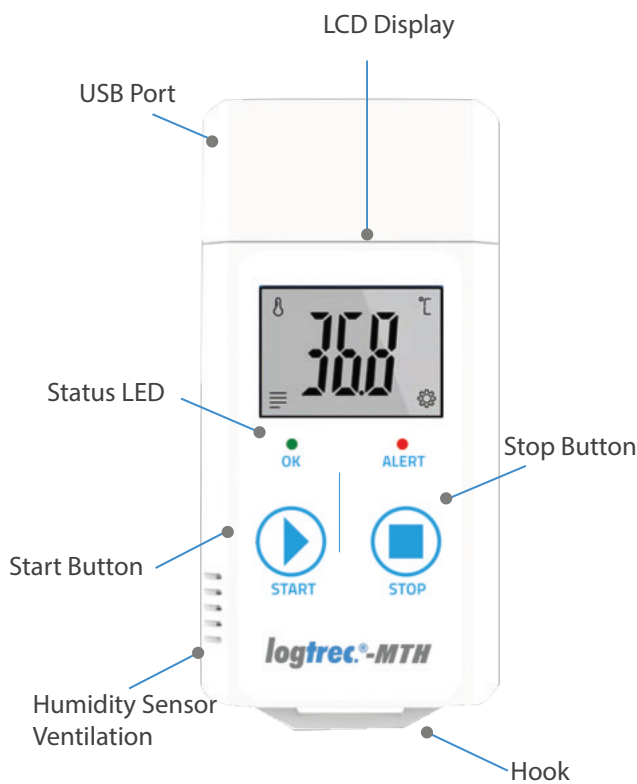

logtrec.[®]-MTH

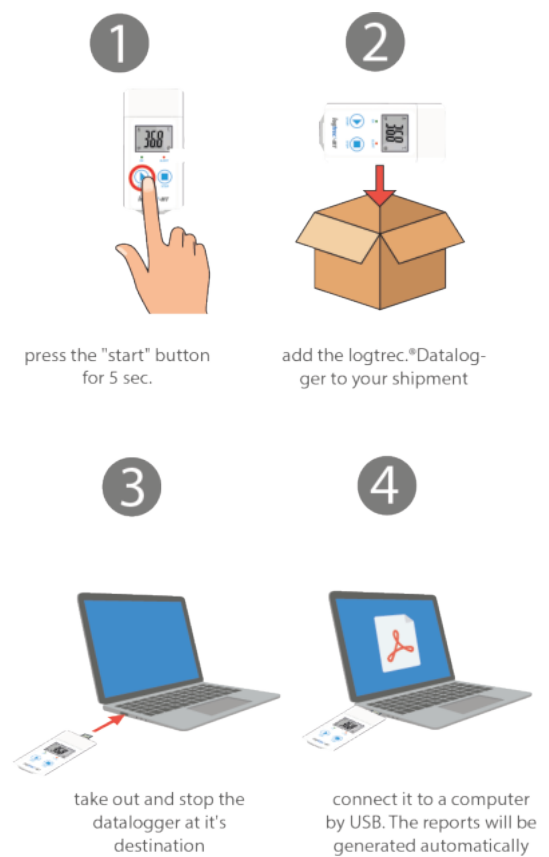

Description	Specifications
Product Model	logtrec. [®] -MTH
Type	Multi Use
Measures	Temperature and Humidity
Measurement Range	-30°C to +70°C and 0% RH to 100% RH
Recording Interval	10 minutes (Standard – can be customized)
Temperature Accuracy	±0.2°C (-20°C to +40°C), ±0.5°C (others)
Humidity Accuracy	±3% RH (typical)
Resolutions	0.1°C and 0.1% RH
Running Duration	110 Days (Standard) or up to 12 Months
Storage Capacity	32.000 Values (16.000 temperature / 16.000 RH)
Shelf life/ Battery	Up to 24 Months
Battery	3.0V lithium Battery/CR2450
Sensor	Internal digital Sensor
Report	PDF/CSV
Auto Generate Reports	Yes
LCD Display	Yes plus LED indication
Alarm / Limits	Customizable (Standard not set)
Digital Certificate of validation	Yes
Validation Certificate	Six points NIST Traceable validation
Certifications	EN12830,RoHS,CE,NIST
Unique Serial Number	Yes
Weight	25g
Size	85mm x 45mm x 18mm (L x W x H)

